

FATSHARK DOMINATOR DIVERSITY MODULE

FIRMWARE UPDATE MANUAL

Download the utility ds30loadergui.exe

Download the .HEX firmware file

Connect module to PC using a microUsb cable and switch the goggles on


If the usb drivers are not present or auto loaded, download from here:

<http://www.ftdichip.com/FTDrivers.htm>

Once the drivers are correctly installed, you will have a new serial port available every time you connect the unit and power it up

So first of all, plug the usb cable and power the unit. You will get the usual sound windows make when a usb device is recognized.

Execute the ds30loadergui.exe software and check if you have the com visible in the port: box

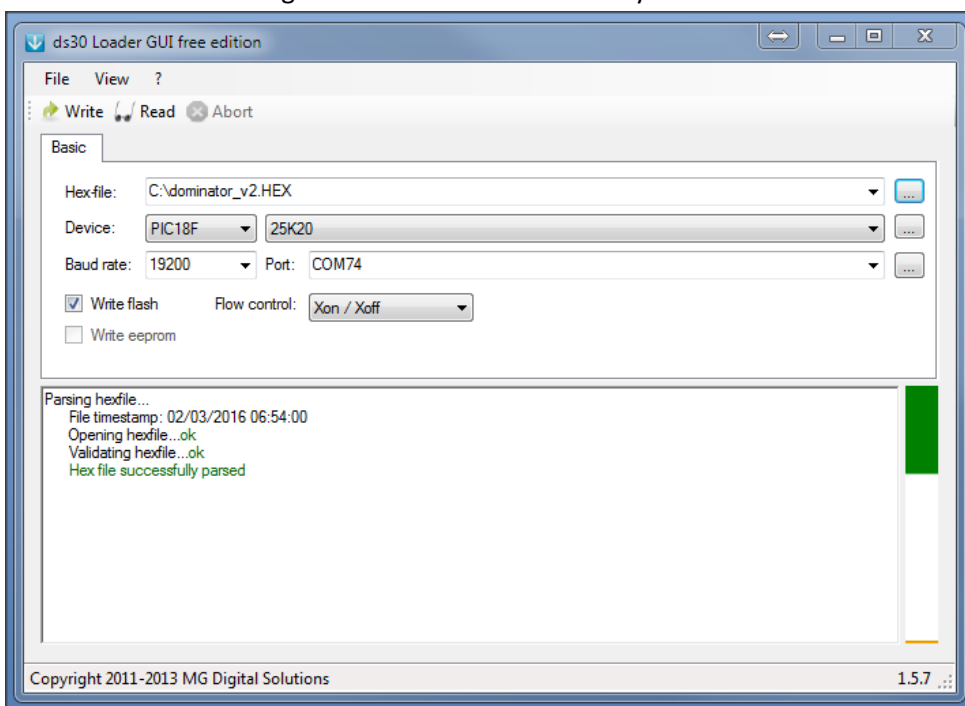

Select the port corresponding to the diversity module

Set all parameters as shown in the picture

Press and keep pressed the Reset pushbutton in the lower left of the module with a rounded tip

Click on write

Release the button

Upload will start.

Wait for completion, disconnect cable and restart

Have fun!